



**WE *RENT* TOOLS
& EQUIPMENT**

Why Advantage Rental Inc.?

Whether you're doing a small job or a major project, renting tools lets you spend time getting the job done, not shopping for tools.

Advantage Rental Inc. is the ultimate workshop - filled with professional grade tools and machines for rent. From the most popular tool rentals, such as a jackhammer, threader or bender to something larger like an Articulating Boom Lift, a 40KW Towable Generator or an Excavator.

You can get exactly what you need for the job without concerns about storage and upkeep.

We Have Tons to Offer YOU!

Free Delivery to the jobsite of all rentals under one week rental (non towable equipment)

No Mileage Fees/ Discounted Delivery within our 15 mile radius of all Large Rentals over 1000lbs. After 15 miles it's a dollar per mile each way. (Towable Equipment)
(only applies to Crafton Location)

Certified Aerial Lift Instructors

Knowledgeable Sales Staff with combined 50 years of experience!

See what Advantage Rental CAN DO FOR YOU!

Did you know Advantage Rental Inc is an ARA Member?

So what is ARA? Is the American Rental Association (ARA) is the international trade association for owners of equipment rental operations and manufacturers and suppliers of rental equipment. The current membership includes more than 10,000 rental operations and more than 1,000 manufacturers and suppliers.

CONTACT US!

CRAFTON

2150 Roswell Dr.
Pittsburgh, PA 15205
Phone: 412-250-4810
Toll-free Phone: 866-683-5010
Fax: 412-921-8112

DUNCANSVILLE

318 3rd Street
Duncansville, PA 16635
Phone: 814-695-5595
Toll-free Phone: 800-252-3530
Fax: 814-695-1265

ERIE

1840 E 10th Street
Erie, PA 16511
Phone: 814-461-0777
Toll-free Phone: 877-844-0777
Fax: 877-844-0777

GREENSBURG

1000 S Main St
Greensburg, PA 15601
Phone: 724-261-5162
Toll-free Phone: 800-442-8045
Fax: 724-836-1089

[HTTP://WWW.ADVANTAGERENTAL.US](http://www.advantagerental.us)

ELECTRICAL

PAGE

BENDERS	2
PULLING	3
PULLING ACCESSORIES	4
CRIMPERS/CUTTERS	5-7
KNOCK OUT SETS	7
DIAGNOSTIC, INSPECTION & LOCATING	8

PLUMBING

THREADERS	9
THREADING ACCESSORIES	9
PROPRESS	10
ROLL GROOVER	10
INSPECTION & LOCATING	11
DRAIN CLEANING/MISC. PLUMBING	12

SAFETY

13

AERIAL LIFTS

AERIAL WORK PLATFORMS	14-15
-----------------------	-------

GENERAL CONSTRUCTION

LOADERS/EXCAVATION	16
BOXER ACCESSORIES	16
TRENCHERS/AUGERS	17
COMPACTION	18
COMPRESSORS	18
SAWS & SAW BLADES	19
GENERATORS	20
HAMMERS	21
CORE RIGS/CORE BITS	22
PUMPS	23
PRESSURE WASHERS	23
HEATERS	23
MISC.	24
LIGHTS	24
MATERIAL HANDLING	24

BENDERS

555 DXRE



Features simple relay controls for easy field repairs & compact handle design to prevent interference with conduit when bending. The optional PVC-coated rigid conduit shoe group can be used on all 555 series benders. 20 AMP GFCI-Protected Receptacle VAC.



854DX



1 shoe bends 1/2" to 2" EMT, IMC & rigid conduit. Absolute encoder stops bending at precise angles. Solid state electronics rated for 1,000,000+ bends. Simple switching between vertical & horizontal bending configurations. Digital pendant sets angle & monitors process.



881CTE980



One bender to bend EMT, IMC & rigid conduit. Fast & easy setup on the jobsite. True One-Shot 90° bends with CT models for quick accurate bends. Steel reinforced follow bars for long life. Bend a 90° elbow in 4" rigid conduit in 95 seconds.



B2000

Cyclone Electric-Powered Conduit Bender is a unique production conduit bender able to bend 1/2" to 2" rigid, rigid aluminum, EMT, & IMC conduit with a single shoe, & no extra parts. It's also capable of bending PVC-coated rigid conduit from 1/2" to 2". Designed to perform bends in both a horizontal & vertical position to create accurate offset bends with the ability to make repeatable bends at the same degree.



77


Current Tools 77RIG 1/2" - 2" electric conduit bender with shoes & accessories. Rugged & dependable electrical system. Easy to maintain & service. Powerful motor will make 180° bends on up to 2" rigid conduit. Removable handle to allow for dogleg bends. Shoes & roller support assemblies will fit Greenlee's 555 electric bender. Comes with No. 700R rigid conduit bending shoes & accessories to bend 1/2" to 2".



EZ-4



1/2" to 4" Manual PVC pipe bender. 2400W, 120V AC, 20 AMP. This portable unit easily rolls to the job site on 6" rubber wheels & features a bright red indicator light alerting you that the unit is "on". This unit will heat the majority of rigid, non metallic PVC pipe sizes (up to 4') for quick electrical conduit installation. Bending plug kit & kink-free cord.

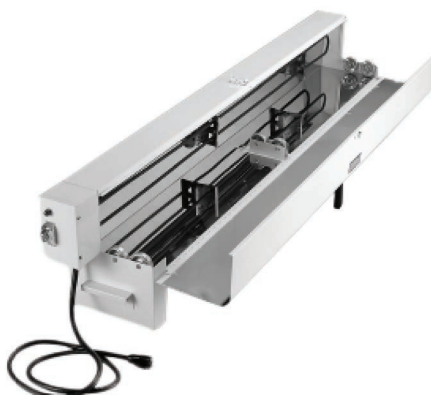

EZ-6P



EZ- 6P. 1/2" to 6" "Powerdrive" PVC pipe bender with ARS-46 adjustable roller stand. 6300W, 230V AC, 28 Amp. EZ-6P provides the "Powerdrive" advantage over the manually operated EZ-6. The motor-driven "Powerdrive" rollers free the operator from having to spend time manually turning the PVC pipe. Don't forget the complete bending plug kit, for faster, code compliant bends.



PULLING

99



Has a hinged upper drive with gas spring assistance to allow for easy side loading. Grip tires can accommodate no lube or regular cable & each wheel is independently driven for max pulling power. It has dual drive motors for max grip on cables & a removable cable separator that guides cables to grip on cables. This feeder may be operated with a low voltage hand control pendant or optional foot switch & it has self-lubricating drive chains that reduce maintenance. The ratcheting tension adjustment on this feeder provides tension on cable from 1/4" to 3 1/2" diameter. Current Tool Cable Feeder 99 similar to Greenlee 6810.

6805

- Mobile Versi-Boom system provides fast set-up with no anchors to set or chains to mount.
- Boom uses 3" rigid steel conduit for easy length adjustment to pull 10 to 20 feet (3 to 6 m) of cable out of the box fast and easy.
- Direct gear drive
- Easy to move around jobsite with mobile carriage.



66

2 speed cable puller has a 6,000lb capacity & comes with a complete set of couplings. Features a rolling base for easy mobility & has an 8 1/2' reach when fully extended. Convenient storage pockets for all couplings & the operator foot switch. The wheel frame unpins to decrease weight for easy of setup.



6810

Feeds cable at variable speeds to match the speed of cable puller. Accommodates cable ranging in size up to 3.5" in diameter. Improved traction with low friction cables. Dual motors drive each wheel for traction on both sides of the cable. Comes with pendant & toggle switch. An optional foot switch is available to control feeding.



CP10K



Has an innovative design that features a 1 person set-up in under 2 minutes. Space saving design folds to 61" L x 28" W x 39" H. Doesn't need to be fastened to conduit. Extended boom allows 12' of cable to be pulled from the conduit to the capstan. Quick toolless angle adjustment features a spring loaded pin to reduce risk of loss while faster positioning saves time & it adjusts up to 300°. Only one person required to easily change pulling direction without disassembly so it not only speeds up & simplifies set-up but is safer for the user & no tools are required.

6906



2 speed Ultra Tugger is the only 2 speed puller that can shift from high speed/low load pulling to low speed/high load pulling with a double tap motion on the foot pedal switch. Use for cable pulls requiring high as well as low pulling loads. The no-load high speed is 16 FT/MIN & is best suited for loads up to 4,000lb where the speed will be 12 FT/MIN.



CP8000

Brutus Tugger 8,000lb. 1-1/2 hp motor starts under full load. Capstan is non reversing with backstop brake. Min 15A, Max 30A. Pulls 10 feet/minute.



PULLING ACCESSORIES

412



Hook Sheave 12". 4,000lb capacity. Forged steel hooks with 1" opening. Welded steel frames. 5" Wide aluminum sheaves with self-lubricating bearings.



Current Tools
FOR THE PROFESSIONAL ELECTRICIAN

424



Hook Sheave 24". 4,000 lb. capacity. Forged steel hooks w/ 1 opening. Welded steel frames. 5" wide aluminum sheaves w/ self lubricating bearings.



Current Tools
FOR THE PROFESSIONAL ELECTRICIAN

812



12" Heavy duty hook type cable sheave with 8,000lbs capacity & forged steel hook with 1-3/8" opening. Heavy duty welded steel frame & self lubricating bearings. Weight 24lbs.



Current Tools
FOR THE PROFESSIONAL ELECTRICIAN

824



24" Hook Sheave. 8,000lb capacity. Forged steel hook with 1-3/8" opening. Heavy duty welded steel frame. Self lubricating bearings.



Current Tools
FOR THE PROFESSIONAL ELECTRICIAN

PF5K

iTOOLCO



Jack up, transport, & power feed any wire (no lifting). Match speeds with iToolco Cannon 10K Puller. Light weight & wheeled for easy maneuvering. Adjustable size to any spool from 22" to 72" diameter. 5,000lb load capacity.

687



13"-27" Reel Stands. Wide, welded steel base for added stability with 5/8" holes. Roller bearings fit in the spindle groove to keep the spindle in place & turning freely. Two stands & a spindle are required for a complete setup.



GREENLEE
A Nelson Company

SF-01



SIMpull Flange Cable Reel Feeder. Independently rotating flanges. Allows inner wooden reel to rotate freely. Shaftless design. Compatible with wooden reels up to 34" & 2000 lbs. 52lbs tare weight per Flange. Integral magnetic flange chocks. Will fit through 36" wide doorways when used with a 32" or smaller reel. Compatible with commercial & residential SIMpull® building wire products, parallels/stacks, portable cord, MV, & metal-clad cable.



683



Reel Stands 22"-54". Wide, welded steel base for added stability with 5/8" holes. Roller bearings fit in the spindle groove to keep the spindle in place & turning freely. Two stands & a spindle are required for a complete setup.



GREENLEE
A Nelson Company

690



GREENLEE
A Nelson Company



Power Fishing System (15' hose). Industrial 2-stage motor. Washable stainless steel filter. Fully equipped power fishing system. Large durable tank – large 12 gallon tank for wet or dry vacuum and storage for the available 15' hose. Air flow - Up to 107 cfm. Application - Powered conduit fishing.

647

62" Steel spindles w/ grooves to fit reel stand rollers.



GREENLEE
A Nelson Company



684

76" Steel spindles w/ grooves to fit reel stand rollers.



GREENLEE
A Nelson Company

CRIMPERS

EK41011



New breakthrough hydraulic pump design results in an extremely compact battery powered crimping tool with capacity to 250MCM copper color coded connectors. Also crimps 5/8 & 840 service entrance connectors. Special compact 9.6 volt Ni-Cd battery reduces weight & size. Can complete approximately 85 crimps per battery charge with 4/0 copper connectors. Ram automatically retracts to signal that crimp is complete. Ram can be retracted in mid-cycle to adjust connector.

K22S1GL



GREENLEE
A Tektren Company



Die kit for 8 AWG - 600 KCMIL copper connectors.

INCLUDES: • KC22-1/0 • KC22-350
• KC22-8 • KC22-2/0 • KC22-400
• KC22-6 • KC22-3/0 • KC22-500
• KC22-4 • KC22-4/0 • KC22-600
• KC22-2 • KC22-250
• KC22-1 • KC22-300

1990



Dieless crimping head. Patented pressure system automatically changes crimping force for each connector size/type. Automatic 2 speed pump for rapid advance. 15 ton max crimping force. Swivel head rotates 180° for max flexibility. For use with connectors up to a maximum of 1.815 diam.

ECCX11



Intelligent Crimping System Technology includes a pressure sensor that monitors the crimping force of each crimp & provides the operator a visual & audible alert if the force is below specifications. State of the art 18V lithium ion battery. Retraction Stop Repeat (RSR) allows the operator to partially retract the ram & then the tool repeats the retraction for subsequent crimps. 2-stage hydraulic system provides fast advance & power speeds, saving time. Tools automatically retract when the crimping or cutting cycle is complete.



KD12AL

Die kit for 6 AWG to 750 KCMIL aluminum connectors. 12 ton "U" type dies for Aluminum.



EK1240L11



Intelligent Crimping System Technology includes a pressure sensor that monitors the crimping force of each crimp & provides the operator a visual & audible alert if the force is below specifications. State of the art 18V lithium ion (Li-ion) battery provides 70% more cycles per charge & faster cycle times. Automatic Retraction Stop (ARS) which retracts the ram just enough to get ready for the next cycle saving time & energy.

KD12CU

Die kit for 6 AWG to 750 KCMIL copper connectors. 12 ton "U" type dies for Copper.



HK12ID



Dieless indent style crimping head does not require interchangeable crimping dies. Flip-open Crimping head rotates 350° to get into tight locations. 2-speed pump provides rapid crimping cycle time. Light-weight & strong fiberglass handles.

IDTB-6

Dieless Hydraulic Crimper 6.2 Ton



ILSCO

CRIMPERS

EK06FTL11



Intelligent Crimping System Technology includes a pressure sensor that monitors the crimping force of each crimp & provides the operator a visual & audible alert if the force is below specifications. State of the art 18V lithium ion (Li-ion) battery provides 70% more cycles per charge & faster cycle times. Automatic Retraction Stop (ARS) which retracts the ram just enough to get ready for the next cycle saving time & energy.



EK1230



Intelligent Crimping System Technology includes a pressure sensor that monitors the crimping force of each crimp & provides the operator a visual & audible alert if the force is below specifications. State of the art 18V lithium ion (Li-ion) battery provides 70% more cycles per charge & faster cycle times. Automatic Retraction Stop (ARS) which retracts the ram just enough to get ready for the next cycle saving time & energy.



EK628L

18V battery powered crimping tool delivers 6 tons of power in a single hand, easily creating the cleanest & most secure wire terminations. This lightweight, tacky-grip crimper automatically reopens when crimping is complete, making it a much more comfortable option for long jobs. Ideal for any professional electrical application, especially extensive projects that require a large amount of crimping.



E12CCXL11



State Of The Art 18V Lithium Ion (Li-Ion) battery provides 70% more cycles per charge & faster cycle times. Retraction Stop Repeat (RSR) allows the operator to partially retract the ram & then the tool repeats the retraction for subsequent crimps.



TDM-500

For copper & aluminum wire. MORE ECONOMICAL. Dieless - no dies to buy or lose. Wide Range - crimps #8 - 500 MCM AL or CU.



CUTTERS

ES32-11



Advance battery powered tool, with up to a 500 kcmil capacity. Innovative two-step scissors style 500MCM cutting blades. Cuts through copper or aluminum. When cut is complete, blades automatically open. Clean, precise cuts. Cutting head rotates 350° for access to tight spaces. Cable cutter is battery powered.



ESG50GL11



Ram automatically retracts after the cut is complete. No need to push a retract lever. Tool is automatically ready to perform the next cut. 2-speed pump advances the ram quickly to start the cut. Cutting blades are specially hardened & precision ground to hold their sharpness. Cutting head rotates 330° for making cuts in tight locations, & flips open to make mid-span cuts easy.



KNOCK Out Sets

7310SB



1/2"-4" Knockout Set. Compact design for field use on construction sites & maintenance jobs. Punches 10x faster than wrench method. Can be used w/ most standard round Slug-Buster® & Slug-Splitter SC® punches (not 1/2", 9/16", 5/8"). Can be used with non-round punches (adapter may be required). 3' hose. Powerful 11 ton hydraulic ram.



LS50L11A



1/2"-2" Battery punch driver. Punch holes from any angle. 360° rotating head. Punches up to 6" holes in 14 gauge mild steel & 2" holes in 14 gauge stainless steel. Automatic retraction prevents damage to punch & die. One trigger controls all tool functions.



154PM



Piece Maker™ Knockout Set 1/2"-4". Hydraulic set designed to split the slug into 2 pieces for easy removal. High strength steel punches & dies for long life. Hydraulic pump reduces punch time vs. manual or ratchet methods. Unique hand pump design w/ heavy duty ram.



DIAGNOSTIC, INSPECTION & LOCATING

435-II

PowerWave data capture – capture fast RMS values to see every waveform so you can determine how the voltage, current & frequency values are interacting.

Power inverter efficiency – Power inverter efficiency

Energy monetization – calculate the fiscal cost of energy waste due to poor power quality

Energy assessment – quantify the before & after installation improvements in energy consumption to justify energy saving devices

Frontline troubleshooting – quickly diagnose problems on-screen to get your operation back online

Predictive maintenance – detect and prevent power quality issues before they cause downtime

Long-term analysis – uncover hard-to-find or intermittent issues

Load studies – verify electrical system capacity before adding loads


FLUKE
1735
FLUKE


3-Phase power data logger is a versatile multi-purpose power quality & energy analyzer. The ideal power meter for conducting energy studies & basic power quality logging. Set the Power Logger up in seconds with the included flexible current probes & color display. The power quality meter measures most electrical power parameters, harmonics, & captures voltage events.

1587
FLUKE


Insulation Multimeters combines a digital insulation tester with a full-featured, true RMS digital multimeter in a single, compact, handheld unit, which provides maximum versatility for both troubleshooting & preventative maintenance. Whether you work on motors, generators, cables, or switch gear, it's ideally suited to help you with your tasks & at a cost that is far less than buying the two products.

DMEG3


Large digital display shows the test function & measured value. 600V AC measurement capability. Insulation resistance ranges 0 – 2000MΩ. 3 test-voltage ranges (250, 500, 1000V DC). Live circuit warning light. Fuse protected. Precision resistance 0.01Ω with audible continuity. 200 mA short-circuit continuity test current for high accuracy. Precision, low resistance test leads (1000 Volt CAT III rated). Audible continuity.

UEI
TEST INSTRUMENTS

IRT20
UEI
TEST INSTRUMENTS

Megohmmeter 1000, 500, 250V analog insulation resistance tester (crank style). 1000, 500 & 250V output ranges. Sealed, water resistant rugged metal housing. Damping time exceeds 4 seconds. Hand-crank power supply.


2260-21


Capture Thermal & Visual Images on each trigger pull for enhanced reporting. Crisp, high resolution 160x120 pixel thermal images for better definition & clarity. Complete report software to easily analyze images. Broader temperature range (-10 to 350°C. 3.5" high resolution LCD (640x480 pixel) for easier troubleshooting. Built-in visual camera & flashlight for improved analysis.

Milwaukee
PE2003

GREENLEE
A Tecton Company

Identifies the exact location of even the smallest breaks in insulation by "pulsing" a high-voltage signal that radiates into the earth at the location of the faults. With the A-frame mounted receiver, a visual analog meter points the way to the source of the voltage. Multiple faults on a single wire can be identified indicating the need to replace instead of repair. Extra-long test leads feature heavy-duty alligator clips for use on multiple cable types includes a rechargeable transmitter, receiver, A-frame, ground stake, 120V charger & a 12V DC (cigarette lighter) adapter. Battery operated (one 12V & one 9V battery are included).

BLL-200

GREENLEE
A Tecton Company

LED & LCD signal strength indicators make it quick & easy to find exact line location. Automatic signal boost makes it easy to trace lines, even those with very weak signals. Receiver may be used in active or passive mode. Receiver locates multiple passive frequencies with a single setting. Receiver automatically locks out passive range when it detects a transmitter signal, reducing the chance of tracing other lines carrying weaker signals.

CS-8000


Advanced patented non-directional sensing technology. Superior sensitivity & functionality providing for accurate tracing & locating. Ergonomic receiver with information-rich full-color graphical LCD. Graphics & audible signal provide quick & easy to understand tracing feedback. Traces concealed wiring, locates junction boxes, & finds breakers for live or open circuits. Locates & identifies blown fuses. Finds shorts & breaks in conductors.

GREENLEE
A Tecton Company

THREADERS

1224
RIDGID

- 1/2" - 4" capacity.
- An induction motor helps minimize noise.
- A special capacitor-start / capacitor-run motor allows the 1224 to thread a full range of material where voltage drop is experienced.
- 1/4"-2" Universal Die Head; 2 1/2"-4" receding die head allows cutting of tapered or straight NPT/NPSM or BSPT/BSPP threads.
- Constant & proper lubrication of dies & workpiece with through-head oiling.


67182/300

The RIDGID 300 Power Drive is a proven workhorse & has been the backbone of thousands of job sites across the country for almost 50 years. To make on-site threading even easier, Ridge Tool offers the 300 Complete that includes everything you need to make threads quickly & easily in the field or in your shop. The 300 Complete offers versatility & function of quick tear down & easy transportation to be able to go wherever you need to go. From the heavy-duty foot switch, solid 1206 stand, robust all-weather 418 oiler, & the redesigned removable tool tray, the RIDGID 300 Complete provides the ultimate in threading form & function. 1/2" - 2" capacity.


RIDGID
141

2-1/2" - 4" capacity. Jaw clutch prevents jamming. Simple adjustment for tapered or straight threads. Cam-type workholder sets instantly. Fully enclosed gearing. Right-hand only.

RIDGID

700

1/2" - 2" capacity. 700 Power Pony. Heavy-duty hand-held Power Drive. Designed for RIDGID® Model 12-R die heads. Other RIDGID die heads (OO-R, OO-RB, 11-R) can be used using adapters. It can also be used with 258/258XL pipe cutters.

RIDGID

161

4" - 6" capacity. Jaw clutch prevents jamming. Simple adjustment for tapered or straight threads. Cam-type workholder sets instantly. Fully enclosed gearing. Right-hand only. Model 161 threads 4", 4 1/2", 5", 6" pipe with one set of dies.

RIDGID

36475

12R Dieset 1/2"-2" NPT dies. All matched threader/sets include die heads, ratchet assembly, ratchet handle & alloy dies. All threader sets use same 12-R dies in die head.

RIDGID


THREADING ACCESSORIES

460

Portable Tristand pipe vise features integral folding legs for easy transport & setup, tool hangers & a base which overhangs the front legs for clear tool swing.

RIDGID

418/10883

Pump assembly provides 50% more oil per stroke than other hand-held oilers for longer die life. An ergonomic 2-finger trigger design that reduces user fatigue. Die cast, heavy-duty body w/ swivel nozzle w/ no exposed parts for longer life. Features a patent pending fastener-less twist & lock drip pan that easily locks in place. The material withstands abrasion, is lighter than metal.

RIDGID

56657/56667

56657- VJ98 Pipe Stand V Head. Locking ring allows for quick vertical height adjustments. The legs fold on the VF-99 Folding Pipe Stand (Cat No 22168) making it easy to transport & require 70% less area to store!

56667- RJ98 Pipe Stand with Roller. Rollers center pipe & allow rotation. Locking ring allows for quick vertical height adjustments. Ideal for use with threading machines, roll grooving, or other pipe working applications.

RIDGID


PRO PRESS

43358


30% smaller tool increases maneuverability. 17% lighter tool reduces operator fatigue. 31% longer service interval (up to 42,000 cycles) maximizes uptime. More than 400 presses per charge using Advanced Lithium 4 Battery. Ultimate flexibility with the ability to switch between battery & AC power on the same tool.

RIDGID
27923


For convenience & portability, the RP 330-B is the logical choice. Featuring a barrel that rotates 270 degrees & a longer service interval, the RP 330-B is designed to handle your toughest construction projects. Powered by a 18V Lithium-Ion Battery, the RP 330-B offers 50% more presses per battery charge than the previous model!

RIDGID
RP210-B


The RIDGID® Model RP 210-B Compact Press Tool is a fast and reliable way to join copper, stainless steel, PEX & multi-layer fittings. This light & compact tool works great for professionals to connect 1/2" to 1 1/4" (12 to 35 mm) tubing. The longest service interval available for compact press tools (32,000 cycles). Powerful 18V Advanced Lithium 2 batteries that maximizes presses per charge for more uptime. 270° swiveling barrel to access tight spaces.

RIDGID
20483
RIDGID


Patented ring design to make pressed connections for 2 1/2" - 4" copper or stainless steel tube. XL-C Rings & V2 Actuator Jaw include patented swiveling feature that allows the tool to connect to the ring at any angle relative to the tubing, allowing greater access in tight spaces. Designed in conjunction with the ProPress XL-C fittings, ensuring total system compatibility. Compatible only with RIDGID® Standard Series pressing tools (CT-400, 320-E, RP 330-B, RP 330-C, or RP 340). V2 Actuator Jaw features new jaw identification clips, for fast, easy identification of the appropriate pressing jaw.

ROLL GROOVER

64977


The RIDGID® Model 918-I Roll Grooving Machine is capable of grooving 1" to 8" schedule 40 & 1" to 12" schedule 10 pipe faster than any roll grooving machine in its class.

RIDGID

INSPECTION & LOCATING

44473/SR-24



The SR-24 is a precision utility locating instrument with GPS and Bluetooth® technology for easy integration with external data capture devices. The SR-24's omnidirectional antennas capture the complete signal field, making it easy to acquire the signal and trace its path. The receiver displays the utility's position and direction on the display, providing an intuitive locating experience. For added confidence, audio and visual warnings notify the operator if the shape of the signal field is being distorted so that appropriate action can be taken to avoid mismarking the utility's position.

RIDGID

21893/SSR-20



RIDGID

Seek Tech SR-20 w/ Transmitter. A lightweight yet rugged receiver that provides all the information needed for faster, more accurate locates.

37888/34618

RIDGID

See Snake 30' 1-1/4-3" Micro. 1/2 the size of popular inspection systems, easily stowed in a truck & carried to the jobsite. Durable & reliable construction with hardened stainless steel camera head spring assembly for a long service life. Long lasting high-intensity lights for exceptional viewing. Stiffer push cable than microdrain.



CS6-RM200

RIDGID

See Snake USB 200' 1.5"-6". One-touch recording, fast, efficient documentation of inspection jobs. Water-resistant keypad direct control of essential camera & monitor functions. Daylight viewable display, crisp, clear in-pipe image. SeeSnake HQ™ Software, edit, archive & deliver reports via print, DVD or online. On-screen keyboard, add custom job information & text notes.



CS10-13998

RIDGID

Choose SeeSnake USB 325' 2-6" standard camera or the self-leveling cameras for upright images. 100% hardened stainless steel camera head spring assembly for durability. Rugged, high-intensity lights for exceptional viewing & long life. Flexible transmitters make locating easy & are compatible with RIDGID® locators. Can be used with any SeeSnake monitor.



33203/14063

See Snake DVD 200' Mini 1-1/2"-8" 33203 OLED DVD Pak Monitor lets you reliably monitor & record inspections in the most extreme conditions. Lets you inspect in colder & brighter situations. The fully weatherized design is light weight & lets you take the DVD Pak into whatever situation you may run into. The high contrast 4.3" LED display has 480 by 272 resolution, & operates smoothly down to -30° F.



RIDGID

33198/13998

RIDGID

See Snake Pack DVD 325' Reel 2-12". Lightweight & small, design makes carrying your tools to the job site & stowing your monitor easier than ever. Exceptional DVD burning reliability, takes the question out of what DVDs to use, & how to finalize correctly. Fully weatherized design, superior job site durability. Lithium-Ion battery power, record inspections regardless of the availability of AC power.



DRAIN CLEANING

KJ-3100



Portable water jetter gives you 3000 psi (205 bar) actual working pressure. This jetter propels a highly flexible & lightweight hose through 2" to 10" lines blasting through sludge, soap, grease, & sediment blockages. As you pull the hose back, it power scrubs the line flushing debris away & restoring drain lines to their full, free-flowing capacity, all without the use of harmful chemicals.

RIDGID

K400



75' of 3/8" cable for 1-1/2" – 3" drain lines. Integrated transport cart. Integrated telescoping handle. Cable control system. "Solid Core" cable, uses tough 3/8" or 1/2" Integral Wound solid core cable that is rugged & kink resistant. Autofeed trigger.

RIDGID

23712

RIDGID



K-1500A Drain cleaning machine. One man can easily clean the heaviest blockages, indoors or out. High speed cleaning gets the job done faster & better. Wheels to the job site, sets up fast, cleans up fast. Low-profile "B" frame design will fit most crawl spaces. Loads & unloads from truck easily.

MISC. PLUMBING

34403



The Press Snap™ Soil Pipe Cutter expands the capabilities of RIDGID® standard press tools by providing a fast & easy way to cut cast iron soil pipe. Without lengthy lever arms used by traditional soil pipe cutters, improved access is a snap. Simply connect the Press Snap cutter to a RIDGID press tool, wrap the chain around the pipe, & press.

RIDGID

68967

SuperFreeze Pipe Freezer is an easy-to-use pipe-freezing unit that allows the contractor to keep water systems operating while making repairs. A mini-refrigeration unit that circulates self-contained refrigerant to its aluminum freeze heads. This forms an ice plug in as little as 6 min. in 1/2" copper tube & can be used with up to 2 1/2" tube or 2" steel pipe.



RIDGID

REGULAR SAFETY & OSHA ANNUAL INSPECTIONS

10023968***Pulling the emergency PIN on a tripod is a min \$700 charge***

The tripod with the Lynx Side Mount Hoist allows for great portability & is used for lifting & lowering materials & personnel via the hoist, while having the ability to use an SRL in conjunction with the rest of the system for fall arrest & emergency evacuation.

**7504S*****Pulling the emergency PIN on a tripod is a min \$700 charge***

3 steel head plates provide added strength & durability. Integral composite pulley within tripod head. Extruded aluminum legs with cast aluminum head & feet provide light weight strength. Cable detent pins secure telescoping leg adjustment. Slip resistant foot belting keeps tripod position secure.

**9534-15****ALLEGRO**
INDUSTRIES

Compaxial Blower w/ 15' canister. Is a Com-PAX-IAL industrial blower that can be an all-in-one ventilation system.

**10116929**

Altair 5x multi gas detector deluxe kit. Its polycarbonate housing protects the detector for drops of up to 10'. The detector also boasts the exclusive MotionAlert, which lets others know if the user has become immobile, & InstantAlert, a manual alarm that alerts others if a dangerous situation has arisen. The glow-in-the-dark housing option makes it easy to see in a confined space, while the large buttons & bright display makes operation possible even when the user is wearing gloves. Altair 5X is capable of measuring up to 6 gases simultaneously & is driven by advanced MSA XCell Sensor Technology. These sensors offer superior response time, stability, accuracy, & reliability together with an extended service life. detector also boasts the exclusive MotionAlert, which lets others know if the user has become immobile, & InstantAlert, a manual alarm that alerts others if a dangerous situation has arisen. The glow-in-the-dark housing option makes it easy to see in a confined space, while the large buttons & bright display makes operation possible even when the user is wearing gloves. Altair 5X is capable of measuring up to 6 gases simultaneously & is driven by advanced MSA XCell Sensor Technology. These sensors offer superior response time, stability, accuracy, & reliability together with an extended service life.



ARTICULATING BOOMS-AERIAL WORK PLATFORMS

Z34/221C

Genie.



Smooth control, durability & efficient power transmission ideal for rough terrain operation. Two-speed hydraulic motors for optimum speed & torque. Zero tailswing & nose swing in all positions allow excellent maneuverability in confined areas. Ascent & descent along a vertical plane with or without boom retraction or extension. 2WD model: 0.68 - 3.0 mph (1.1 - 4.8 km/h) with 37% gradeability. 4WD model: 0.68 - 3.0 mph (1.1 - 4.8 km/h) with 45% gradeability.

GS-1930

Genie.



The Genie® GS™-1930 slab scissor lift is easy to maneuver in tight spaces, has a 25-ft working height, boasts quiet electric, zero-emissions operation & is ideal for indoor & outdoor applications on firm, level surfaces.

- Large platform workspace with 36" roll-out platform extension
- Front-wheel drive & zero inside turning radius
- Multiple disc brakes provide smooth deceleration
- Drive speed interlock limits speed while elevated

GS-2632

Genie.



26' Scissor Lift. Zero-emission electric operation. 39" roll-out platform extension. High angle steering for excellent maneuverability. Folding rails with half-height swing gate standard on GS-2632. Universal 20 amp smart charger. Proportional controls for lift & drive functions. On-board diagnostics for easy troubleshooting. Multiple disc brakes provide smooth deceleration. Emergency stop at both platform & ground controls. Solid, non-marking tires. AC power to platform.

AWP-40S-SS

The Super Straddle™ allows you to use the Genie® AWP™ in areas you never thought possible. The Super-Straddle™ provides up to 4' (1.22m) of vertical clearance over fixed obstacles. Easily access light bulbs, ceiling panels, or maintenance tasks above permanent seating, stairwells, & other obstructions. End frames adjust so the Super-Straddle™ can be used on slopes of up to 6 degrees - perfect for auditoriums & theaters. The redesigned Super-Straddle™ conforms to ANSI A92.3 standards.



AWP-40S

Genie.



Man Lift 40'. A tilt-back frame allows the AWP-40 to roll through doorways. Quick set-up & simple to operate. Durable patented Genie® mast system. Easy to maneuver around & over obstacles with the Rocker Base System. Small outrigger footprint for positioning close to walls. Easy loading & transport in pickup trucks. Super-Straddle option to work over fixed seating.

TZ34/20

Genie.



Articulating Z-Boom Lift 34' Trailer Mounted DC. Rugged & heavy-duty. Extension boom with self-leveling platform. Variable-speed control system. 359° non-continuous turntable rotation. Tilt alarm/sensor. Forklift pockets. Dual pneumatic jockey wheels for precise positioning during setup.

TZ50DC

Genie.

50' Articulating Boom DC Lift Trailer Mounted. Optional Drive & Set™ feature lets you drive the unit from the platform when fully lowered. 359° non-continuous turntable rotation. AC power to platform. Illuminated outrigger indicators. Tilt alarm/sensor.



HY-BRID HB SERIES

HB-1230



12' Electric scissor lift alternative to vertical mast lifts. This allows for easier maneuverability around confined spaces and greater productivity on projects. With its 18' working height, the lift is ideal for contractors to work on projects like electrical, plumbing, drywall and sprinkler systems. Zero turn radius. Large working platform. Slide-out deck extension, with slip-resistant surface. Weight allows machine to go on delicate flooring. Lifts 550 lbs. Non-marking tires.

HY-BRID LIFTS™
BY CUSTOM EQUIPMENT LLC

HB-1430



14' Electric scissor lift alternative to vertical mast lifts. Hy-Brid Lifts self-propelled series have high lifting capacities, low step-in heights & a lightweight design, making them the ideal choice for a variety of applications. Working height up to 20 ft. Weighs only 1650 lbs. Weight allows machine to go on delicate flooring. Lifts 670 lbs. Slide-out deck extension, with slip-resistant surface. Non-marking tires. Proportional controls. Full-Swing entrance door. Tilt alarm. Hour meter.

HY-BRID LIFTS™
BY CUSTOM EQUIPMENT LLC

BALLYMORE SERIES

DMSL-12



Drivable Mini 12' Scissor lift.
Working Height - 19'
Platform Lowed Height - 33"
Platform(W x L) - 28" x 46"
Platform Extension - 22"
Base - 30" x 46"
Overall Height - 77"
Weight - 1300lbs
Power - 2-12V batteries



DSL-32



Drivable 32' Scissor lift.
Weight Capacity - 700lbs
Working Height - 38'
Platform Max/Min - 32'/48"
Platform (WxL) - 44" x 90"
Platform Extension - 36"
Base (WxL) - 46" x 98"
Overall Height - 96"
Weight - 5533lbs
Power Batteries - 4-6V
• Self-locking gate on platform rather than chain entry
• Automatic pothole protection
• Drivable at full height
• Extendable (cantilever) platform
• Automatic braking system
• Forklift pockets
• 2wd
• Tilt sensor with alarm
• Emergency lowering valve
• Emergency stop button



STAND-ON LOADER

532DX



Boxer 32hp Kubota Diesel Compact Utility Loader with 44" bucket is the first mini-skid offering variable-width, rubber track undercarriage, which allows the units to enter through gates as narrow as three feet wide.



EXCAVATOR

PC27MR-2



The short tail PC27MR-2 supplies optimal power & digging speed in confined spaces: yards, road works, demolition works, sewers, wherever traditional machines cannot work.



SKID LOADER

SK815



Highly versatile & compact, the SK815 skid steer loader is the result of the competence & technology that Komatsu has acquired over the past 80 years.



BOXER ACCESSORIES

TRENCHER

ST5158-36



36" Standard Trencher with Chain. 20.5-HP (15.3 kW) Kohler Gas Engine. 6" trench width. 24" or 36" trench depth. Ride-on operator platform for improved visibility, operator comfort & reduced fatigue. Two-speed ground travel. Planetary trencher drive. Spring-loaded boom.



700106

High Torque Auger Head. Ideal for digging holes from 9" & 18" deep.



9" & 18"



9" x 36" & 18" x 36" auger bits with 2.56" round hub – 42" overall bit length. 6-11-teeth – HDR-style auger for rock & frozen ground.

2005106



5' Hydraulic Snow Blade. 30° left/right hydraulic angling. 7-gauge (4.6 mm) steel blade. Spring-loaded trip mechanism. Adjustable skid shoes. Reversible, replaceable wear edge (optional rubber edge). Includes universal mount & hydraulic hoses with flat-face couplers. For use on all Boxer models.



2005106



The Land Plane, also known as a land leveler, is a very useful tool for doing fine leveling and site preparation. Cut, grade and level in both directions with this bi-directional attachment. 48" width. 36" length. Grades and backfill rough ground. Carrying platform for brush, trees, blocks, etc.



D612RTSD



6'X12' System Trailer with Electric Brakes

18" TRENCHER

T-4-HS18



The Ground Hog T-4 Trencher 3" x 18" is a small, operator propelled, chain-type trencher designed for jobs requiring up to a 18" deep trench. Heavy gauge powder coated steel is used throughout the T-4's construction as well as tapered roller bearings & double-row ball bearings to ensure trouble-free service.

22973



***See Boxer with Trencher Attachment for 36" Ride on Trenching**



Count on it.

TRX-20 20hp Walk-Behind Trencher 36". The TRX trenchers are tracked, dedicated walk-behind trenchers that have it all. Tracks, combined with Toro's exclusive easy-to-use control system - provide unparalleled maneuverability, all while offering the ultimate in operational performance.

ONE MAN AUGER

TIA-350PFS

AUGER=GAS/OIL MIX

32.2 cc, 1.6 HP two-stroke engine provides excellent throttle response, reliable starting & proven durability. S-Start system reduces the amount of pull-force required by 40%. Tall wrap-around handles protect the engine from damage & provide the operator with more leverage. Sound reduction system. Primer for fast starting. 33.2 output torque (ft/lbs). 17.6 lbs



Tanaka

TWO MAN AUGER

TEA-500

TEA-500 50cc Gas 2 Man Auger helps save time & reduce hassle that come with a standard auger. Enhanced safety & comfort features such as dual safety throttles, anti-vibration wrap around handles & gear case lock. Weighing at 37 lb. reduces user fatigue for both operators. Tanaka's heavy duty TEA-500 Two Man Auger tackles the toughest digging jobs without breaking the bank, or your back!



Tanaka

AUGER BITS

2", 4", 6", 8", 10", 12"

These earth bits feature alloy steel blades & screw bits for maximum digging performance & versatility in a wide cross section of soil compositions. 30" effective digging depth. 1" diameter round drive shaft connection.



Tanaka

EBF-EXT

Extension shaft adds 15" to any Tanaka auger bit. 1" dia round drive shaft connection. Fits ALL Tanaka power heads. Fits 2" - 12" Tanaka model auger assemblies. Use with Tanaka augers only.



Tanaka

COMPACTION

MTX70HD



Cyclonic air cleaners that capture 98% of airborne dust particles. Long-lasting laminated wood & steel shoe. Low vibration handles for operator comfort. Combination hour meter/tachometer. Durable guards to protect the engine from damage. Redesigned fuel tank to meet EPA standards for evaporative emissions.

RS-75



Extremely light weight to power ration. Superior air filter. Superior shock isolation system lowers vibration level at operator handle. Height-adjustable handles for operator convenience. All in one fuel off lever & engine stop switch. Diaphragm carburation. Heavy lift compaction jobs. Back fill. Large site work. Trench work, utility gas & electric.

PC-800



Dual belt drive. Removable water tank with heavy duty hose & valve. Heavy duty hardened steel plate. Superior shock absorbing isolators.



COMPRESSORS

TPB-60



Toku paving breakers offer a rugged & reliable tool for whatever tasks you have for them. Toku breakers feature a rugged four bolt back head, drop forged alloy steel construction, forged latch retainers, replaceable chuck bushings, & safety triggers. Shank Size - 1-1/4" x 6". Stroke Length - 4". Piston Diameter - 2-1/4". Impact Rate - 1,400 B.P.M. Weight - 66 lbs. Overall Length - 25-3/8". Air Consumption - 70 C.F.M. Air Inlet - 3/4" NPT. Hose Size - 3/4".



MOIL POINT



For general chiseling and breaking work in brickwork, concrete and loose stone, for example when laying cables

CHISEL



3" WIDE CHISEL



ASPHALT CUTTER



M58



The Mobilair M58 portable rotary screw compressor delivers 210 cfm at 100 psig & is designed for heavy-duty civil & commercial construction, demo, sand blasting, & other site work applications. Heavy-duty 4-cylinder Kubota diesel engine meets Tier 4 Final EPA emissions standards. Anti-frost valve maintains optimum operating temperature & prevents tool freeze up.

TPB-90



Toku paving breakers offer a rugged & reliable tool for whatever tasks you have for them. Toku breakers feature a rugged four bolt back head, drop forged alloy steel construction, forged latch retainers, replaceable chuck bushings, & safety triggers. Shank Size - 1-1/4" x 6". Stroke Length - 6". Piston Diameter - 2-5/8". Impact Rate - 1,250 B.P.M. Weight - 92.4 lbs. Overall Length - 28-1/2". Air Consumption - 77 C.F.M. Air Inlet - 3/4" NPT. Hose Size - 3/4".



CC1305E1XL



Portable walk behind saw with Baldor electric motor & 18" blade capacity. Portable walk behind saw for wet & dry applications. 5 HP Baldor electric, 1 PH, 230V powered engine. 18" blade capacity.



EK7651H Makita



The 14" MM4® 4-Stroke Power Cutter is the world's 1st 4-stroke power cutter. No oil mixing is required. The engine eliminates the need for separate mixed oil/fuel can. (Straight Gas)

CC1313HS-XL



13hp Honda gas walk behind saw 18". 6-3/4" max cutting depth. Slip-on blade guards. Left or right side sawing. 18" max blade capacity. Cyclone air filter. Through rear axle for added strength. 3 V-belts for extra power delivery to the blade shaft. Solid, sealed self aligning blade shaft bearings.

1365



BOSCH

Invented for life

14" portable abrasive cutoff machine features a compact, lightweight design with a wrap-around side handle. The unit's large footplate improves stability & allows a 4-3/4" depth of cut. The wheel rotation carries sparks, dust, & debris away from the operator. Bosch's service minder brushes stop the tool when preventive maintenance is required. Offers a large footplate that improves stability & allows greater depth of cut, smooth on both sides for guiding.

FS400LV



The robust FS 400 LV is a convenient all-round petrol push floor saw. The adjustable handle ensures an ergonomic working position. Perfect weight distribution gives excellent stability while sawing. Ideal for small road repair jobs in concrete or asphalt, up to 162 mm cutting depth. Output power - 8.7 kW
Output power at tool shaft - 8.6 kW
Engine cooling - Air
Fuel tank volume - 6.1 l
Cylinders - 1
Number of strokes - 4-stroke engine
Arbor diameter - 25,4 mm
Blade depth control - Handwheel
Blade diameter, max - 450 mm
Cutting depth, max - 162 mm




Rent Saw BLADES

12", 14", 18" BLADE



Heavy Duty Orange Segmented High Speed Ultimate Diamond Blade 12 X .125 X N. The diamond depth is .295 inch & the segment height of .394 inch. Dry blade can also be used with water for cooling. For use on high speed, masonry & low horse power walk behind saws.



Dry cut with ease using the Core Cut 14" Heavy Duty Dry Concrete Blade. It has wide gullets to keep the blade cool. Laser welded for dry cutting. For use on concrete & asphalt.



250" Diamond Depth. Fast cutting blade that works well with a wide variety of high or low HP saws. Combines long life performance while maximizing your blade dollars.



GENERATORS

EM5000SXK

5000W, 120/240V. Powers fridge, furnace, well pump, & much more. Inverter - stable power for computers & more. Electric start w/ remote start capability. 2 wheel kit, easy to transport. Powerful Honda commercial OHV engine.

HONDA
GENERATORS



EM6500SXK2AT

6500W, 120/240V. Provides 7,000W for 10 sec to start larger equipment. Powers fridge, freezer, furnace, well pump, & more. Long run time - up to 10.4 hrs. Powerful Honda iGX commercial engine. Electric start (battery included) with recoil back-up.

HONDA
GENERATORS



EB10000AH

10,000W, 120/240V. Honda commercial GX engine & heavy duty frame. Full GFCI protection. OSHA worksite compliant, meets job site emission & safety requirements. 2 wheel kit & lift hook. Best fuel efficiency & lowest noise rating in its class. Electric start.

HONDA
GENERATORS



150REOZT

150 KW Towable Generator. Heavy-duty air cleaner with air restrictor indicator. Battery, battery rack, & cables. Water separator fuel filter. Battery disconnect switch. Block heater.

KOHLER
IN POWER. SINCE 1920.



40Kw

KOHLER
IN POWER. SINCE 1920.

45REOZT4, 60 Hz, Diesel, Tier 4 Mobile. Fuel Tank 293L (77 gal.) provides 33 hours of run-time at 75% load. Sound level of 68 db(A) @ 7 m (23 ft) at full load prime rating. 110% environmental containment of fuel, oil & coolant. Kohler's DEC3500 digital controller is encapsulated for protection against vibration & environmental conditions, auto senses voltage eliminating the need to program voltage changes & includes paralleling functionality. Certified by the EPA to conform to Tier 4 Final nonroad emissions standards. Uses Exhaust Gas Regeneration (EGR) & diesel oxidation catalyst to meet Tier 4 Final without a Diesel Particulate Filter. Electronic, isochronous governor. Heavy-duty air cleaner with restrictor indicator.



HAMMERS & DRILLING - ELECTRIC & AIR

DEMO HAMMERS

BH2760VCD



Brute Breaker Hammer. Total portability, operates on 115/120V AC/DC, 15AMP outlet or 2,500W portable generator. Vibration Control™ system, elongated air cushion in the hammer mechanism for all-day use. Ergonomic shock absorbing handles, also reduces vibration for greater user comfort. Service Minder™ brushes preventative-maintenance assurance for long tool life.



BOSCH

Invented for life

11316EVS



BOSCH

Invented for life

SDS Max Demo Hammer-Chisel/PT/GR. A powerful 14 Amp motor with Constant Response™ circuitry. This provides a constant hard-hitting 12.4''/lbs. Of impact energy. Variable speed control allows users to adjust the impact force to the material being removed. The SDS-max® tool holder provides you with the largest assortment of Bosch brand steel accessories for every job.

TPB-60



60lb Air Hammer w/1-1/4" Shank medium duty. Excellent for breaking asphalt, concrete & brick.

TPB-90



90lb Air Hammer w/1-1/4" shank heavy duty. Breaks aggregate concrete, slag or foundation removal.

ROTARY HAMMERS - DRILLING & CHISELING

11263EVS



1-3/4" SDS-max® rotary hammer features best in class drilling & chiseling performance with 7.6 ft.-lbs. Impact energy (Penta). The hammer features 2 modes of operation. Rotary hammer or hammer-only & a variable speed dial for controlled drilling & chiseling applications. The tool also features the Vario-Lock™ function. This allows the chisel to be rotated into 12 different positions to optimize the working angle when used in hammer only mode.



BOSCH

Invented for life

RH850VC



RH850VC 1-7/8" SDS-max® rotary hammer provides nearly the same drilling/ chiseling performance as the current 2" hammer. It also only weighs 75% of the weight of the 2". The RH850VC also provides a triple play for active vibration reduction, longer air cushion, tuned mass damper & decoupled main handle.



BOSCH

Invented for life

DH40MRY



1-9/16" SDS Max Rotary Hammer. Powerful 9.2 Amp motor. High drilling speed. High demolishing performance. Sturdy aluminum casing w/ internal double insulation construction. Variable speed with constant speed control. 2 mode action (rotary hammer drilling & hammer only) with neutral position for easy positioning of chisels.

HITACHI
Inspire the Next

CORE RIGS

RS-65



M-4 stand alone drill stand. Combination vacuum anchor angle stand for Weka motor, 30 long mast. Reversible slide handle. Quick release motor mount. High strength, hard anodized 1-5/8" x 2" aluminum column. Leveling bolts on all model bases. Hand held option. Carriage lock. 4 Leveling screws on base. Light weight & portable.



M1



2-1/2" square column (mast) with black oxidized finish. 6" wheels for easy mobility. Dual switch/outlet control panel with amp meter. 4 leveling screws on the base. Slide handle allows for drilling in tight areas. Great for the general contractor or pro contractor. Ceiling jack helps keep the rig in place as a backup for anchoring or vacuuming the base down (used with a brace piece - 2 x 4 or other material).



DK13



Hand held & portable. Side handle. 14 amp. 580/1400/2900 RPM. Electronic overload. Dry Attachment. Thermal overload protection switch. Side handle for stability. Water connection for wet coring only. 5/8"-11 or 1.250"-7 Spindle. Three speed for bits up to 3" (6" mounted).



BCR130/5BG



Handheld Drill w/MID Handle 2.6HP. Made with the highest quality raw materials utilizing the most advanced manufacturing technology. The BCR130 / 5BG is a hand held core drill with a back-grip making it ideal for drilling vertical holes. It comes equipped with a 2.6HP motor and 3-Speed Gearing for optimal drilling at any diameter. All Beast / B+BTec core drills are extremely powerful & loaded with countless features including an LED Motor Overload Protection System.

Powerful 2.6HP/2.000W drill motor
Ideal for vertical drilling
3-Speed gearing for optimal drilling performance
5" Diameter bit capacity
Diameter: 5" Capacity
Motor Size: 2.6 HP / 20 Amp / 2,000 Watt
Wet/Dry

BEAST
BY LACKMOND

COREBITS

1-1/2"-10"



CORE BORE

Highest quality diamond concentration meant for smaller holes in very heavy steel & extremely hard aggregate. UOL - Cured concrete. UOF - Hard aggregate with high steel.



TD4-300

Durable TPE diaphragm & check valves for extended wear life. Double inside mechanical seal with SIC faces provides the longest operational life. Oil Lifter provides lubrication of the seal faces. Heavy duty Chain Drive OHC system.



WT20X/WT30X

WT20X - 2" Trash Pump. Heavy-duty 2" construction trash pump. Easy starting Honda OHV commercial engine. 185 gal./min capacity. Solid handling capability up to 13/16". Cast iron volute and impeller. Quick clean out port.



WT30X - 3" Trash Pump. Heavy-duty 3" construction trash pump. Easy starting Honda OHV commercial engine. 317 gal./min capacity. Solid handling capability up to 1 1/16". Cast iron volute and impeller. Quick clean out port.

HONDA

PRESSURE Washers

BG303037

3000psi 3gpm Gas pressure washer. Shark cold-water belt-drive series provides a broad selection of rugged belt-drive units, all with reliable Honda GX engines, which deliver cleaning volume of up to 3.7 GPM. Each model is ETL certified to UL-1776 safety standards & comes with a rugged steel chassis, cast iron belt pulley system, tubed pneumatic tires, & industrial-grade Kärcher crankcase pump.



PCH2600C

PORTER CABLE



2,600psi water pressure & 3.0 GPM produces 7,800 cleaning units. 6.5 HP Honda Commercial series gas engine provides oil alert sensor, & quiet operation. CAT industrial grade pump has high flow oil bath lubrication & thermal protection. Stainless steel spray wand with 5 nozzles. 25' x 5/16" heavy-duty hose & quick connect fittings ensures high flow & safety.

HEATERS

KBE5L-VAL 6

111,000 btu Infrared Heater. High & Low output control making it very economical. Is a Fuel preheater to keep fuel moving smoothly as temperature decreases. KBE5L's state of the art combustion chamber enables virtually 100% fuel to energy conversion. This translates to clean, odorless, smokeless operation &, more importantly, fuel savings. Impervious to nature's elements (wind, rain, & snow), the KBE5L is able to transfer infrared heat directly to the object without any loss of heat or air movement.



DAYSTAR PH5-VAL 6

51,800 btu Infrared Heater. The Daystar brings you both "infrared heat" & "forced air heat" by adopting a dual heating system. Perfect for spot space heating in a large open area. 40lbs. Daystar is ultra portable & can be used anywhere you need to stay warm.



EPX

140,000 btu Infrared Heater. 20% larger radiation disk & improved atomization. EPX features a state of the art High/Low output control that enables its user to choose between a high or low output setting. EPX boasts an Advanced Monitoring System that includes automatic shutdown. In the event that the main body reaches above normal temperatures or the system detects over voltage conditions, the heater will automatically shutdown to prevent malfunction of main components.



KBM52U



Mechanical 2-speed gearbox with continuously variable electronic speed reduction means optimum cutting speed for drilling, tapping, reaming & countersinking. Compact design & optimum power-to-weight ratio. FEIN high-power motor with stable speed. Speed-controlled tacho electronics. Powerful electromagnet.

17833080



The Windsor Saber Blade 16" is a compact, powerful scrubber perfect for scrubbing in congested areas. The Saber Blade 16 has two squeegees for pick up in forward & reverse & an ergonomic flip handle that folds down for easy storage.



LIGHTS

BD1000MH



Dual Head Metal Halide Light Tower is both versatile & portable. Powerful enough to light up 109,000 square feet with a single 100W metal halide bulb, durable enough for construction sites, & portable enough to fit in the trunk of a car. ETL listed. Weatherproof light tower telescopes to 12 1/2'. Folds to only 19" H for easy storage & transport.

WPLH5E-2MH



Gas Generated Full-spectrum 6500K daylight provides more realistic illumination, & is easier on the eyes. Instant-on & immediate full intensity, no warm-up or cool-down, never any waiting. 50,000-hour LED lifespan reduces maintenance. Industrial grade fixtures are heavy-duty, rugged & extremely durable.



MATERIAL HANDLING

784346



Drywall Lift w/ Hand Truck. Solid, safe construction. 2-speed winch handle. Quick, tool-free assembly. One person operation. Tilts 65deg. Lifts loads of 150Lb/70 Kg up to 11.5'/3.5m or 15'/4.5m. Loads at a convenient 34"/86 cm designed for safety.



783651



Material Lift 650lb 18'. Rolls through standard doorways & tail gates. Loading Bar - great for overhead cranes. Reversible forks. Plunger pins for quick readjustment & compact storage. No tools needed - no loose parts.





412-250-4810